

#### **FEDERAL INDUSTRIES**

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

Email: geninfo@federalind.com Website: www.federalind.com

Project Name:	AIA#
ltem #:	
Model #: Qty:	SIS#
Approval:	

# **ELEMENTS™** CONVERTIBLE SERVICE OVER REFRIGERATED SELF-SERVE MERCHANDISER

Display a variety of products and serve more customers with presentation and value in mind without sacrificing performance.



MODEL	<b>DIMENSIONS</b> (Includes End Panels)
□ ESSRC5052	50 x 34 x 52 (in)
	1270 x 864 x 1321 (mm)
□ ESSRC5952	59 x 34 x 52 (in)
	1499 x 864 x 1321 (mm)
□ ESSRC7752	77 x 34 x 52 (in)
	1956 x 864 x 1321 (mm)

# STANDARD FEATURES

# **Refrigerated Self-Serve Bottom Display**

- Steel base construction with black exterior.
- Black interior.
- Horizontal LED top light.
- Two-tier black display step.
- Thermometer.
- Condensate evaporator provided for a self-contained system.
- Easy clean, rustproof insulated evaporator coil compartment.
- Easily accessible light switch and adjustable power switch
- Average case temperature of 38° to 40°F is maintained.
- Rear access to the refrigeration system for quick and easy service.
- R449a Refrigerant.
- Adjustable leg levelers.
- · Cord and plug.

#### **Service Top Display**

- Baffle system converts display from non-refrigerated to refrigerated.
- Clear glass rear sliding doors.
- Adjustable black wire shelf.
- Shielded top and shelf light.
- Thermometer.

#### **Shelving**

• Adjustable black wire shelf.

#### Lighting

- 3500K LED Horizontal top light and shelf light.
- DLC Certified, IP66 rated.

# **Agency Approvals**

- UL Safety and UL Sanitation Listed.
- DOE 2017 Compliant







AIA#

# ELEMENTS™ CONVERTIBLE SERVICE OVER REFRIGERATED SELF-SERVE MERCHANDISER

SIS#


**Product Specifications** 

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C	
All	Packaged Refrigerated Products	38°F / (3.3°C)	

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

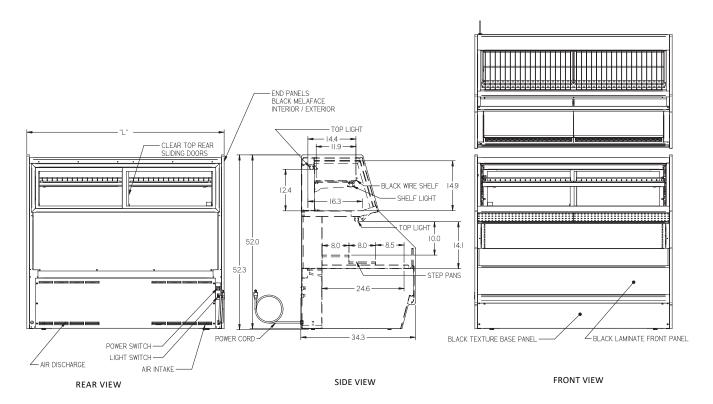

MODEL	DIMENSIONS			SHIPPING WHT		SELF-CONTAINED	NEMA Plug		
MODEL	L	D	Н1	UNITS	LBS	KILO	WITH CONDENSATE PAN		
ESSRC5052	50	34	52	in.	720	720 327	230/60/1 - 1/2 HP - 10 AMPS	NEMA 6-15 p	
	1270	864	1321	mm.		32/			
ECCDCEOES	59	34	52	in.	845	845	845 383	230/60/1 - 1/2 HP - 12 AMPS	NEMA 6-20 p
ESSRC5952	1499	864	1321	mm.			845   383		
ESSRC7752	77	34	52	in.	1010	1010 458	450	230/60/1 - 13/4 HP - 13 AMPS	NEMA 6-20 p
	1956	864	1321	mm.			227, 227, 227, 1111 237, 1111 3	πεπικό 20 β	

- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.









**Phone:** 800-356-4206 **Fax:** 608-424-3234

**Email:** Geninfo@Federalind.com **Website:** Federalind.com